

## OPERATING INSTRUCTIONS

Turn locking lever (#4134) to open the pistol. Cock hammer to first catch, which is loading position. Secure hammer by shifting safety lever (38145) downward, red dot must not be seen. Insert cartridge, close pistol and lock by moving locking lever to original position.

## GENERAL RULES

Never point a weapon at anyone even when unloaded.

When loading and unloading point the muzzle to the floor.

Use only the caliber of ammunition which is stamped on the gun.

For the protection of others as well as yourself, always use extreme care. **You are handling something that is considered a firearm.**

RG assumes no responsibility for physical injury or property damage resulting from either intentional or accidental discharge of this weapon.



**RG INDUSTRIES, INC.**

1416 N.W. 20th STREET / P.O. BOX 13000 BISCAYNE ANNEX/MIAMI, FLORIDA 33162

## RG 18 and RG 17 DERRINGER PISTOL




Stock No.	Model/Fin	Cal.	Barrel Length	Overall Length	Capacity	Weight Oz.
00161801	RG 18 Bl	22 Wgn.	3"	4 1/4"	2	15
00073401	RG 17 Bl.	38 Spec.	3"	4 1/4"	2	15
00227101	RG 17 Ni.	38 Spec.	3"	4 1/4"	2	15



# RG 16, RG 17

Cal 22 Mgn. Cal 38 Spec

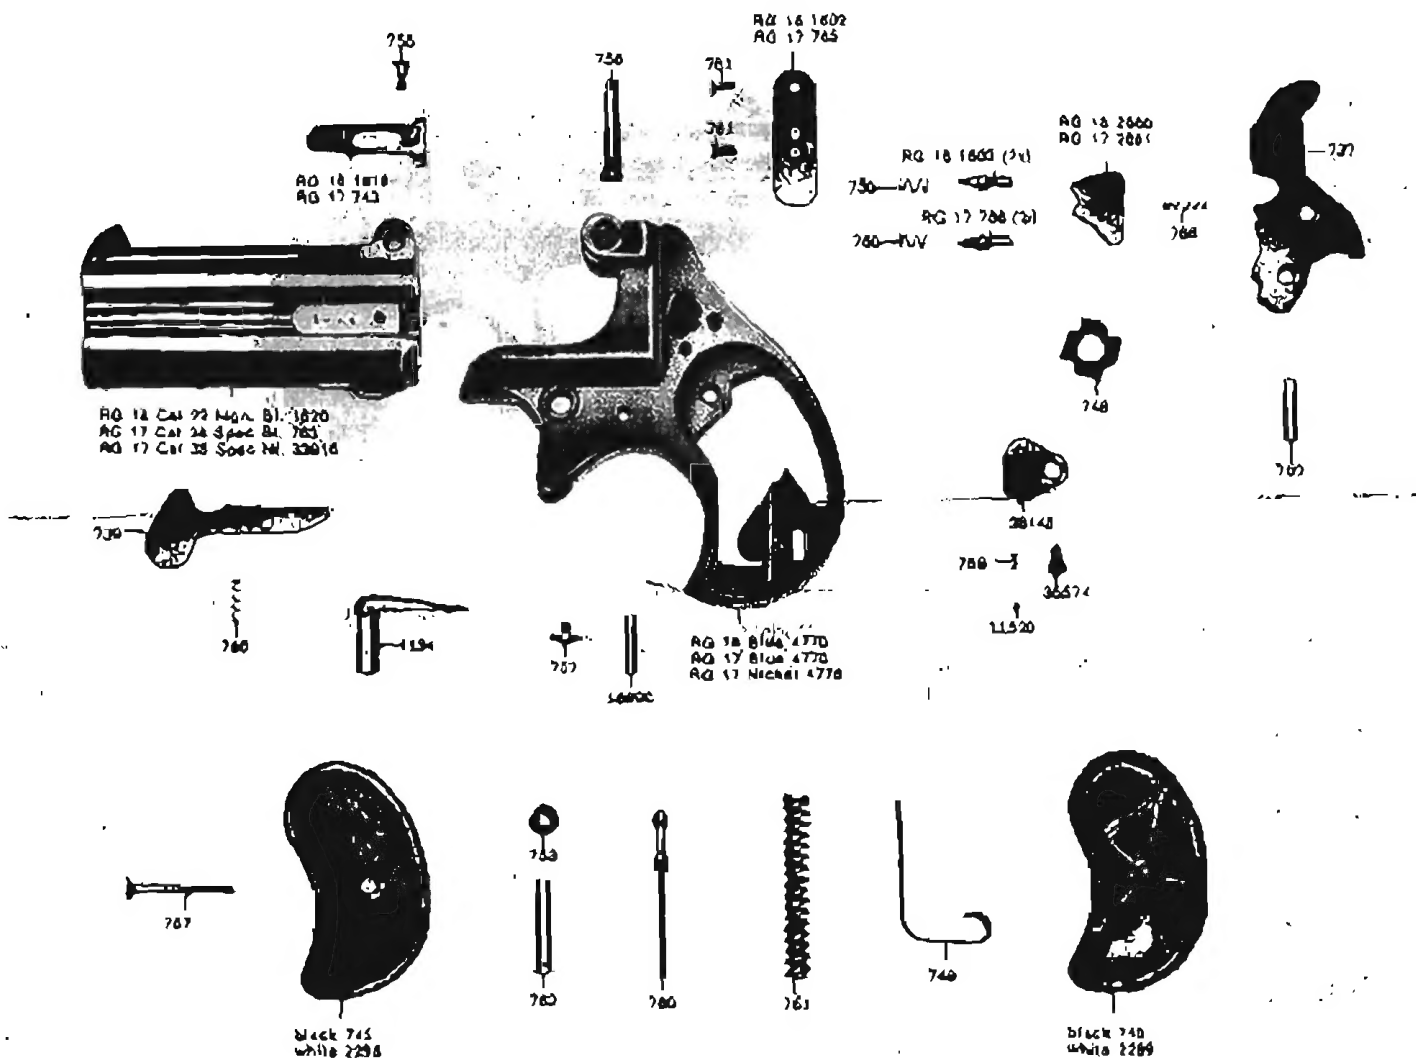

Stock No.	Description	Unit Price
737	Hammer	3.90
739	Trigger	1.65
743	Ejector, RG 17 Cal. 38 Spec.	3.10
745	Grip plate, left, black	.90
748	Grip plate, right, black	.90
748	Switch wheel	.45
748	Transport spring	.45
750	Pressure spring	.45
751	Pressure spring	.45
752	Straight pin	.45
753	Washer	.45
755	Lens head screw	.45
758	Joint screw	.65
757	Lens head screw	.45
760	Spring rod bar	.85
761	Screw	.45
762	Hollow rivet	.45
763	Barrel AG 17, Cal 38 Spec, blue	20.00
765	Cover plate RG 17 Cal. 38 Spec.	.85
766	Firing pin AG 17 Cal. 38 Spec.	.45
767	Lens head screw	.45
768	Pressure spring	.45
768	Pressure spring	.45
1602	Cover plate, RG 16 Cal. 22 Mgn.	.85
1603	Firing pin, RG 16 Cal. 22 Mgn.	.45
1619	Ejector, AG 16 Cal. 22 Mgn.	3.10
1620	Barrel AG 16 Cal. 22 Mgn.	20.00
2298	Grip plate, left, white	.90
2299	Grip plate, right, white	.90
2880	Hammer slide AG 16 Cal. 22 Mgn.	1.10
2861	Hammer slide AG 17 Cal. 38 Spec.	1.10
4134	Locking lever	1.10
11520	Ball	.45
16899	Straight pin	.45
33816	Barrel AG 17, Cal 38 Spec. Nickel	21.00
33574	Lens head screw	.45
38145	Safety lever	.85
4775	Frame, Bl. Cal. 38 Spec. RG 17	
4776	Frame, Ni. Cal. 38 Spec. RG 17	
4770	Frame, Bl. Cal. 22 Mgn. AG 16	

\* must be factory filled

**PARTS ORDER INSTRUCTIONS:** Although we strictly sell wholesale, parts may be obtained directly from us. Please order by model, cal. and parts number. Send your check together with your order and add \$2.00 to the total amount for postage and handling.